





Technical Data

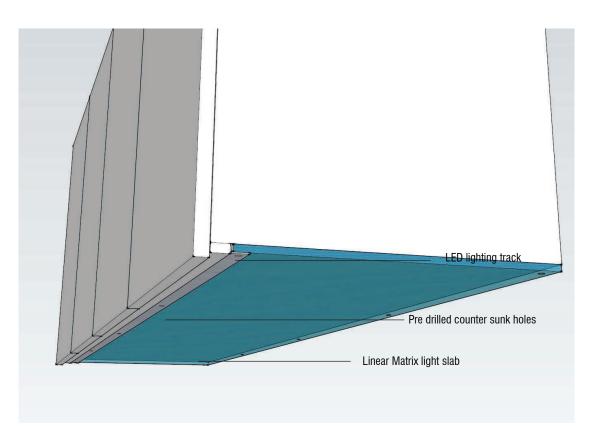

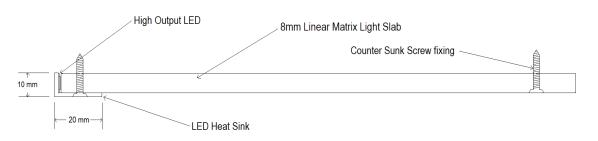

Panel Depth: 10mm - single sided.

Illumination: Linear Matrix light slab incorporating premium quality super bright

white SMD LED technology.

Colour Rendering: 3000k Warm White

4000k Neutral White 6000k Pure White

Optional Dimming: PWM (Pulse Width Modulation)

DALI / DALI-2 **DLunatone DALI**

1-10v Analog

RF/hand held standalone remote

Application: Indoor applications ONLY.

Power: 15watts per Linear Metre @ 24vDC.

Linear Matrix light slab depth: 8.0mm.

Minimum MFG size: 300 x 300mm.

Maximum MFG size: 3000 x 450mm.

Standard sizes: Any size from minimum to maximum sizes, all units are made to order.

Power cable exit: To be established by client.

LED mounted heat sink 20 x 10mm satin natural anodised aluminium.

Mounting: Linear Matrix light slab supplied counter sunk & pre drilled for easy

installation.

LED driver: External of light slab, 1 x LED driver can run multiple under cabinet lighting units.

Manufactured: Designed and Manufactured in Australia.

Warranty: 5 years LED illumination & LED driver (Return to Base).